

# STANDATA bulletin 19-BCB-003(REV1)/20-PCB-010

## Building/Plumbing

### Radon/soil gas pipe labelling

Date Issued: April 2023

Page 1 of 3

#### Purpose

This bulletin identifies the requirements within the National Building Code-2019 Alberta Edition (NBC(AE)) for labeling of radon/soil gas pipes.

#### Discussion

Plumbers often install the rough-in piping for soil gas piping systems. As radon requirements are contained in the NBC(AE), this bulletin assists plumbers and other installers with the appropriate code references.

Radon piping systems are part of an exhaust or active soil depressurization (ASD) system.

Part 3 buildings have requirements for labeling of radon/soil gas piping systems. Part 6 of NBC(AE) is applicable to Part 3 buildings or designed systems. Part 6 references EPA 625/R-92/016, "Radon Prevention in the Design and Construction of Schools and Other Large Buildings."

Part 9 buildings have prescriptive requirements for labeling of radon/soil gas piping systems in NBC(AE) Subclause 9.13.4.3.(3)(b)(iii).

Unless stated otherwise, all Code references in this STANDATA are to Division B of the National Building Code-2019 Alberta Edition

Issued by the Provincial Building and Plumbing Administrators

*[Original signed]*

*[Original signed]*

Paul Chang  
Provincial Building Administrator

Sidney Manning  
Provincial Plumbing Administrator

Alberta Municipal Affairs – Technical and Corporate Services  
Phone: 1-866-421-6929 Email: [safety.services@gov.ab.ca](mailto:safety.services@gov.ab.ca)

To sign up for our List Subscription Service: [http://municipalaffairs.gov.ab.ca/am\\_list\\_subscription\\_services](http://municipalaffairs.gov.ab.ca/am_list_subscription_services)

[alberta.ca/building-codes-and-standards.aspx](http://alberta.ca/building-codes-and-standards.aspx)

[alberta.ca/plumbing-standata.aspx](http://alberta.ca/plumbing-standata.aspx)

©2023 Government of Alberta | April 2023 | Municipal Affairs



## Code References

### NBC(AE) Clause 6.2.1.1.(1)(i)

#### 6.2.1.1. Good Engineering Practice

(See Appendix A.)

- 1) Heating, ventilating and air-conditioning systems, including mechanical refrigeration equipment, shall be designed, constructed and installed in conformance with good engineering practice such as that described in, but not limited to,
- ....i) EPA 625/R-92/016, "Radon Prevention in the Design and Construction of Schools and Other Large Buildings."

### NBC(AE) EPA 625/R-92/016, "Radon Prevention in the Design and Construction of Schools and Other Large Buildings."- 2.1.1.4 Radon Vent Pipe

#### Labeling of System Components

Label the exposed radon vent pipe to identify the pipe as a component of a radon vent system that may contain hazardous levels of radon. Labels should be placed at regular intervals (at least every 10 ft) along the entire pipe run. Clearly mark all components of radon reduction systems as radon reduction devices to ensure that future owners of the building do not remove or defeat the system. At the roof exit, attach a permanent label to the vent with a warning such as "Soil gas vent stack may contain high levels of radon; do not place air intake within 25 ft."

### NBC(AE) Article 9.13.4.1.

#### 9.13.4.1. Application and Scope


- 1) This Subsection applies to
  - a) wall, roof and floor assemblies separating *conditioned space* from the ground, and
  - b) the rough-in to allow the future protection of *conditioned space* that is separated from the ground by a wall, roof or floor assembly.
- 2) This Subsection addresses the leakage of *soil* gas from the ground into the *building*.

### NBC(AE) Subclause 9.13.4.3.(3)(b)(iii)

#### 9.13.4.3.(3)(b)(iii)

- 3) The rough-in referred to in Clause (1)(b) shall include
  - b) a pipe not less than 100 mm in diameter installed through the floor, such that
    - iii) the pipe is clearly labelled near the cap and, if applicable, every 1.8 m and at every change in direction to indicate that it is intended only for the removal of radon from below the floor-on-ground.

**FOR ADDITIONAL INFORMATION: Use the following link to the Canadian – National Radon Proficiency Program (C-NRPP) and to obtain Pipe Labels: [www.c-nrpp.ca](http://www.c-nrpp.ca)**

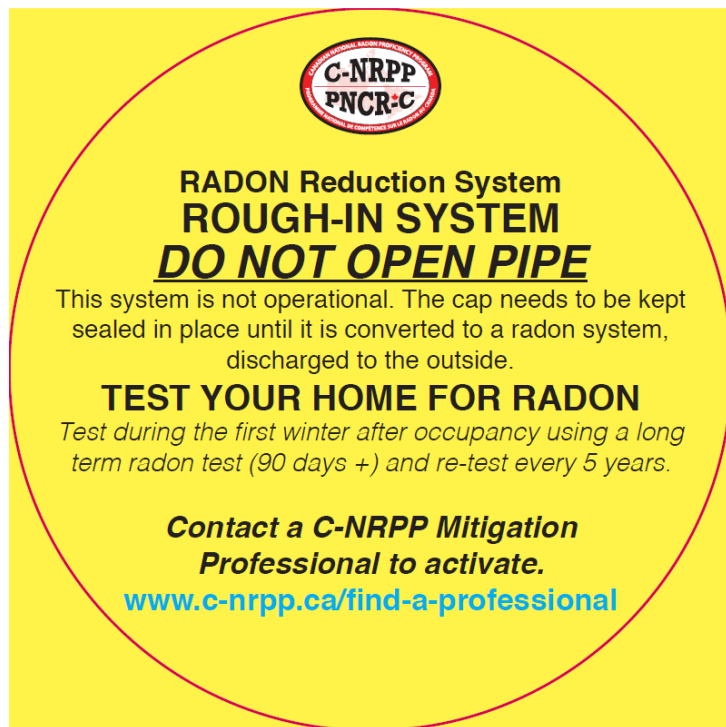

**C-NRPP**  
**PNCR-C**

**RADON Reduction System**  
**ROUGH-IN SYSTEM**  
**DO NOT OPEN PIPE**

This system is not operational. The cap needs to be kept sealed in place until it is converted to a radon system, discharged to the outside.

**TEST YOUR HOME FOR RADON**  
*Test during the first winter after occupancy using a long term radon test (90 days +) and re-test every 5 years.*

**Contact a C-NRPP Mitigation Professional to activate.**  
[www.c-nrpp.ca/find-a-professional](http://www.c-nrpp.ca/find-a-professional)

**Disclaimer:**

*The information in this bulletin is not intended to provide professional design advice. If professional expertise is required with respect to a specific issue or circumstance, the services of a professional should be sought.*